

DAILY 4X4

Single & Crew Cab



4 ALL TRACKS ALL CONDITIONS

ENGINE

Power: 132kW @3500rpm
Torque: 430 Nm @1500rpm

TRANSMISSION

6 Speed Manual
ZF 8 speed Hi-Matic automatic (Optional)

MASS RATINGS

GVM: 7000kg
GCM: 10500kg

WHEELBASE

3480mm
3780mm
4175mm

KEY FEATURES

- Powerful yet efficient advanced 3.0 litre turbo diesel engine
- Low emission levels – engine meets stringent Euro 6 standards
- Optional market-leading 8-speed full automatic transmission
- Standard 6-speed manual transmission
- Ventilated disc brakes with ABS and ESP 9
- Ergonomically-designed cabin based on the award-winning 4x2 Daily range
- New C-Section Chassis
- Auto HVAC climate control system

For available options & details see the next pages.


WARRANTY

- Standard Warranty
- 3 years /100,000 km (whichever occurs first)

IVECO
Drive the road of change

ENGINE

| | |
|--------------------|---|
| Engine Model | FIC Euro 6 Step-E, 3.0L with variable geometry turbine (VGT), EGR & SCR |
| Total Displacement | 2998cm ³ |
| Maximum Power | 180HP @3500rpm |
| Maximum Torque | 430 Nm @1500rpm |

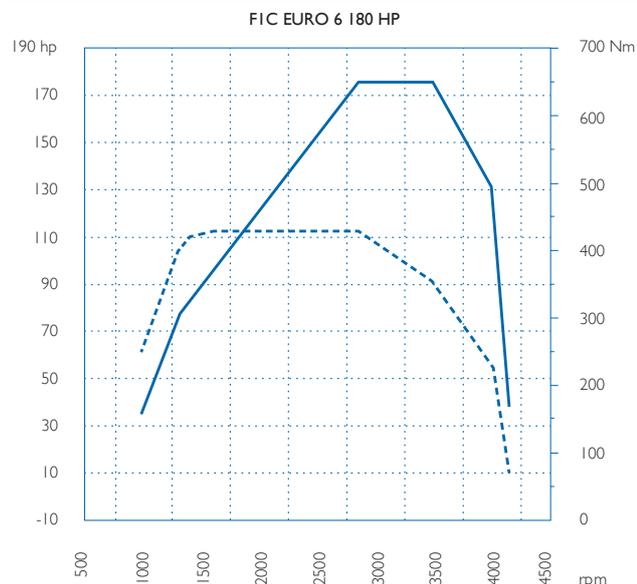

| | |
|-----------------------|--|
| Number of cylinders | 4 (16 valves) in line |
| Fuel Injection system | Electronically controlled direct injection, common rail & high pressure pump |
| Bore x Stroke | 95.8 mm x 104 mm |

TRANSMISSION

| | | |
|--|--|------------|
| Description | FPT 6 speed manual (Standard) | |
| | ZF 8 speed Hi-Matic automatic (Optional) | |
| Gear ratios: FPT 6 speed manual | 1st: 5.375 | 4th: 1.365 |
| | 2nd: 3.154 | 5th: 1.000 |
| Gear ratios: ZF 8 speed Hi-Matic automatic | 3rd: 2.041 | 6th: 0.791 |
| | Rev. 4.838 | |
| Gear ratios: ZF 8 speed Hi-Matic automatic | 1st: 4.696 | 5th: 1.285 |
| | 2nd: 3.130 | 6th: 1.000 |
| Clutch (Manual only) | 3rd: 2.104 | 7th: 0.839 |
| | 4th: 1.667 | 8th: 0.667 |
| | Rev. 3.297 | |

POWER TAKE-OFF

| | |
|----------------|----------|
| Power Take-off | Optional |
|----------------|----------|

STEERING

| | |
|--------------------------|----------|
| Hydraulic Power Steering | Equipped |
|--------------------------|----------|

WHEELS & TYRES

| | |
|---------------------|---------------------------|
| Wheel and tyre type | 265/70R19.5 OFF-R Pirelli |
|---------------------|---------------------------|

FUEL & ADBLUE® TANK

| | |
|--------------|--|
| Fuel Tank | 90L |
| AdBlue® Tank | 24L |
| Optional | 110 L Fuel Tank* (No spare wheel mount on side of chassis) |

FUEL SAVING FEATURES

| | |
|-----------|-------------------------|
| EcoSwitch | Equipped (only on Auto) |
|-----------|-------------------------|

EXPANSION MODULE WITH CAN OPEN INTERFACE

- Equipped
- Lights control
- Run lock function
- Alarm function
- Body Builder CAN interface
- Advanced PTO controls

SUSPENSION

| | |
|------------------|----------------------------------|
| Front suspension | Independent Front Suspension |
| Rear suspension | Parabolic Rear Suspension 3 leaf |

FRAME

| | |
|------|---|
| Type | C-Section, 184 mm (height), 69 mm (width), 5 mm (thickness) |
|------|---|

BRAKING SYSTEM

| | |
|---------------------------------|---|
| Type/Control | ESP 9: |
| | - ABS (Antilock Braking System) |
| | - ASR (Anti Slip Regulator) |
| | - EBD (Electronic Brake force Distribution) |
| | - ESP (Electronic Stability Program) |
| | - HFC (Hydraulic Fading Compensation) |
| | - HHC (Hill Hold Control) |
| | - HRB (Hydraulic Rear Wheel Boost) |
| | - LAC (Adaptive Load Control) |
| | - RMI (Roll Movement Intervention) |
| - ROM (Roll Over Mitigation) | |
| - TSM (Trailer Sway Mitigation) | |
| Front: Diameter/Thickness | Ventilated disc/301 x 30 mm |
| Rear: Diameter/Thickness | Ventilated disc/306 x 28 mm |
| Parking Brake | Manual brake operating on rear axle |

ELECTRICAL & ELECTRONICS

| | |
|------------|---|
| Battery | 12 Volt-110 Ah |
| Alternator | 12 Volt-180 A, Battery cut-off switch (in-dash) |

SAFETY FEATURES

| | |
|---|----------|
| Cruise control | Equipped |
| Reverse buzzer | Equipped |
| Engine fan deactivation system | Equipped |
| Driver and passenger airbags | Equipped |
| Daytime running lights (DRL) | Equipped |
| Halogen headlights | Equipped |
| Fog lights | Equipped |
| Engine immobiliser | Equipped |
| Central locking with remote control & door locking management | Equipped |
| Steering lock | Equipped |

CAB EXTERIOR


| | |
|--------------|---------------------------|
| Front grille | Chrome |
| | Oil sump guard protection |

CAB INTERIOR

| | |
|--|--|
| | Equipped |
| | - Trip computer |
| | - Analogue speedometer |
| | - Analogue tachometer |
| | - Fuel level indicator |
| | - Coolant temperature gauge |
| | - 3.5" high resolution TFT colour display and silver dial rings |
| Instrument cluster | - TFT Display Panel includes: digital speedometer, oil, battery and service information |
| | - Navigation and phone multimedia, fuel economy, trip computer, vehicle settings, display settings and diagnostics |
| | - Engine oil level display |
| In cab handles LHS and RHS for cab access | Equipped |
| Upper shelf storage compartment | Equipped |
| Hi-Connect Multimedia + Navigation | Apple CarPlay®, Android Auto® and DAB+ radio |
| Differential lock control x 3 (Front, centre and rear) | Equipped |
| Dash mounted gear lever | Equipped |
| Fabric interior trim (2 tone) | Equipped |
| Driver seat* | 3 degree heated, suspended & adjustable w/ lumbar adjustment & armrest |
| | 2 person bench seat with 3-point seatbelts and extractable table |
| Passenger seat* | Optional (for single cab): 3 degree heated, suspended and adjustable w/ lumbar adjustment and armrest (standard on dual cab) |
| *Both seats include new memory foam technology | |
| Cab rear window | Equipped |
| Single zone automatic climate control | Equipped |
| Leather steering wheel | Equipped |
| Padded headrests | Equipped |
| Electric windows | Equipped |
| Steering wheel controls | Equipped |
| Heated electric adjustable mirrors | Equipped |
| Underseat storage | Equipped |
| Beverage holders: 2 x cup, 2 x bottle | Equipped |



Overseas Model Shown

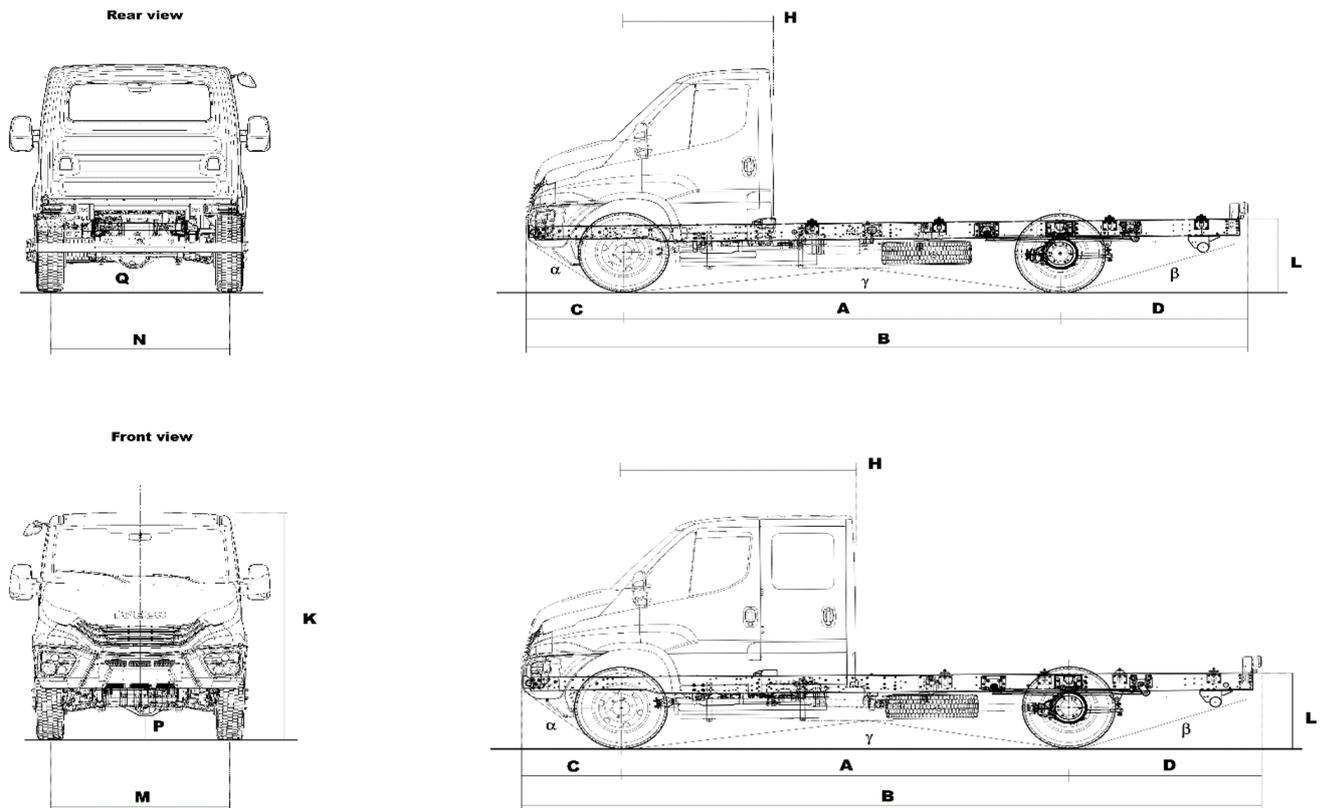

DIMENSIONS

| | SINGLE CAB | | | CREW CAB | | |
|---|------------|--------|--------|----------|--------|--------|
| | 3480mm | 3870mm | 4175mm | 3480mm | 3780mm | 4175mm |
| Wheelbase (A) | 3480mm | 3870mm | 4175mm | 3480mm | 3780mm | 4175mm |
| Overall length (dependant on wheelbase) (B) | 5348mm | 5853mm | 6818mm | 5348mm | 5853mm | 6818mm |
| Front overhang (C) | 928mm | 928mm | 928mm | 928mm | 928mm | 928mm |
| Rear overhang (D) | 940mm | 1145mm | 1715mm | 940mm | 1145mm | 1715mm |
| Front axle to front of body (H) | 1430mm | 1430mm | 1430mm | 2181mm | 2181mm | 2181mm |
| Overall height (unladen) (K) | 2508mm | 2506mm | 2501mm | 2499mm | 2496mm | 2492mm |
| Frame height at end of frame - unladen (L) | 872mm | 872mm | 882mm | 869mm | 870mm | 882mm |
| Front track (M) | 1725mm | 1725mm | 1725mm | 1725mm | 1725mm | 1725mm |
| Rear track (N) | 1713mm | 1713mm | 1713mm | 1713mm | 1713mm | 1713mm |
| Front ground clearance (P) | 263mm | 263mm | 263mm | 263mm | 263mm | 263mm |
| Rear ground clearance (Q) | 225mm | 225mm | 225mm | 225mm | 225mm | 225mm |
| Approach angle (α) | 35° | 35° | 35° | 35° | 35° | 35° |
| Departure angle (β) | 33° | 29° | 17° | 33° | 29° | 17° |
| Ramp angle (γ) | 157° | 158° | 155° | 157° | 158° | 155° |

DIMENSIONS & WEIGHTS

| | SINGLE CAB | | | CREW CAB | | |
|------------------------------------|------------|---------|---------|----------|---------|---------|
| Wading Depth | 640mm | 640mm | 640mm | 640mm | 640mm | 640mm |
| Unladen frame height at front axle | 780mm | 781mm | 778mm | 768mm | 769mm | 766mm |
| Unladen frame height at rear axle | 853mm | 851mm | 852mm | 848mm | 846mm | 848mm |
| Turning circle: kerb to kerb | 14100mm | 14900mm | 16100mm | 14100mm | 14900mm | 16100mm |
| Overall width | 2056mm | 2056mm | 2056mm | 2057mm | 2057mm | 2057mm |
| GVM | 7000kg | 7000kg | 7000kg | 7000kg | 7000kg | 7000kg |
| GCM | 10500kg | 10500kg | 10500kg | 10500kg | 10500kg | 10500kg |
| Towing capacity (braked) | 3500kg | 3500kg | 3500kg | 3500kg | 3500kg | 3500kg |
| Front axle capacity | 2700kg | 2700kg | 2700kg | 2700kg | 2700kg | 2700kg |
| Rear axle capacity | 5000kg | 5000kg | 5000kg | 5000kg | 5000kg | 5000kg |
| Kerb mass front axle | 1935kg | 1898kg | 1950kg | 2150kg | 2125kg | 2190kg |
| Kerb mass rear axle | 1033kg | 1080kg | 1050kg | 1183kg | 1218kg | 1175kg |
| Kerb mass total | 2968kg | 2978kg | 3000kg | 3333kg | 3343kg | 3365kg |
| Payload capacity | 4032kg | 4022kg | 4000kg | 3667kg | 3657kg | 3635kg |

Weights are standard configuration and include: chassis cab, driver (75kg), full fuel tanks, oils, tools kit and spare wheel (when present).

OPTIONS

5.86 : 1 Rear axle ratio (speed limited to 90km/h)

ZF 8 speed Hi-Matic automatic

110L fuel tank

Transfer box PTO (ISO 4 bolts Pump connection)

Passenger seat: 3 degree heated, suspended & adjustable w/ lumbar adjustment & armrest (Single Cab only as standard on Dual Cab)

IVECO Trucks Australia Limited ABN 86 004 065 061 Princes Highway, Dandenong, Victoria 3175 PO Box 117 Dandenong, Victoria 3175 Telephone (03) 9238 2200 www.iveco.com.au The information in this document was correct at the time of printing. The data in this document is approximate. If an exact weight or dimension is required please contact your local authorised IVECO Dealer. Always consult an authorised IVECO Dealer for the latest information on the vehicle before deciding to place an order. Overseas images are shown throughout this document and images may refer to equipment that is optional. The models described can be subject to modifications without any notice by the manufacturer. IVE3080. 01/2023.